


Ka-band Pyramidal Horn Antenna

Versatile RF & MW Test Solutions

Withwave's Ka-band Pyramidal Horn Antenna operates in the frequency range from 26.5 GHz to 40 GHz. It has gain of 22 dBi(Typ.) and return loss of -10 dB(Typ.)

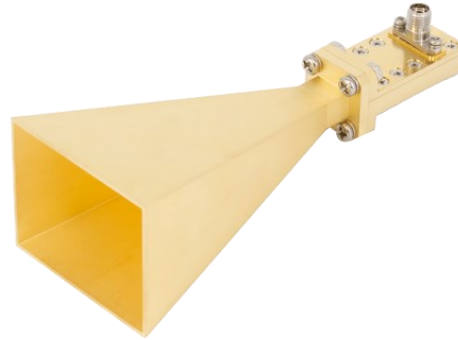

■ Features

- Freq. range : 26.5 to 40 GHz
- Gain : 22 dBi (Typical)
- Port : 2.92 mm(Female)

■ Specification

Scope	Specification	WAKH-02
Electrical	Type	Horn Antenna
	Freq.	26.5 to 40 GHz
	Gain (Typ.)	22 dBi
	Return Loss(Typ.)	-10 dB
	Half Power Bandwidth	E-plane ; 10 deg. H-plane : 13 deg.
Mechanical	Port	2.92 mm(Female)

■ Drawing

